


# ECOSEAL 201 Cloth Tape

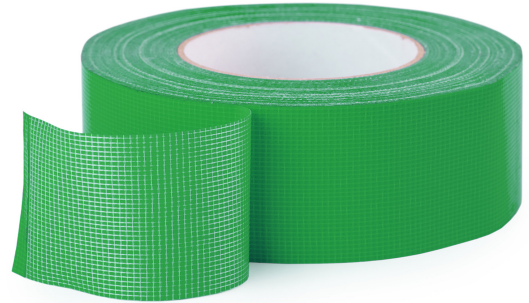

**EcoSeal 201 Cloth Tape** is designed with a high tack acrylic adhesive for a quick and easy-to-use experience.


- ✓ Superior adhesive and cohesive holding power
- ✓ Fast fixing and hand-tearable
- ✓ Ideal for all weather conditions
- ✓ Suitable for indoor and outdoor application

#### APPLICATION

**EcoSeal 201 Cloth Tape** is formulated specifically to join, seal and repair overlapped edges of vapour barriers or building membranes. The high tack acrylic adhesive offers excellent tack and cohesion for residential projects. Can also be used for flooring mat's fixing on non-woven fabric, ground tiles (ceramic, natural stone) and concrete ground.

#### STRUCTURE

**EcoSeal 201 Cloth Tape** is made of PE woven fabric and coated with acrylic adhesive with superior holding power.



< PE woven fabric  
< Acrylic adhesive

#### AVAILABILITY

48 mm x 50m (2.4m<sup>2</sup>)

Properties	Classification	Performance
Total Thickness	PSTC-133 / ASTM D 3652	200 Micron
Adhesion to Steel	PSTC-101 / ASTM D 3330	30 N/25mm
Tack Rolling Ball	PSTC-6 / ASTM D 3121	5 cm
Tensile Strength	PSTC-131 / ASTM D 3759	100 N/25mm
Elongation	PSTC-131 / ASTM D 3759	15 %
Service Temperature	-	-20°C +80°C
Applying Temperature	-	-20°C~ 40 °C

#### STORAGE

Product may be stored in a clean, level surface and kept in room temperature, away from alkaline products, cement and mortar. 12 months of shelf life when stored at 21°C (70°F) / 50% relative humidity out of direct sunlight.